

Creva za gorivo :

Gč creva – creva za dovod goriva


Namena : Transport motornog goriva i ulja

Sastav : Gumeno crevo otporno na gorivo zaštićeno sa čeličnim opletom

Radna temperatura : – 40°C do + 130°C (max 135 °C)

NAZIV ARTIKLA	DN (mm)	Radni pritisak (bar)	Rasprskavajući pritisak (bar)
GČ DN 04	4	8	40
GČ DN 06	6	6	30
GČ DN 08	8	6	30
GČ DN 10	10	5	25
GČ DN 13	13(12)	5	25
GČ DN 16	16	4	20
GČ DN 19	19(20)	4	20
GČ DN 25	25	4	20



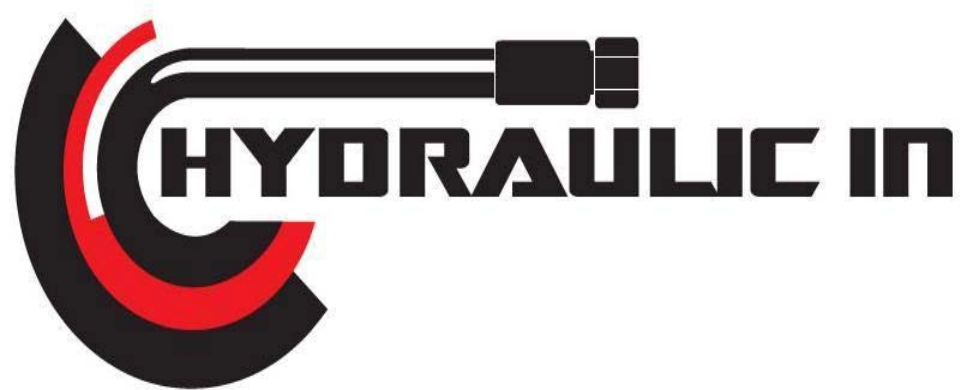

CREVO ZA BENZISKE PUMPE

