

POLIAMIDNA CREVA ZA PNEUMATIKU

Poliamidno crevo za pneumatiku - ravna :

Namena : Za transport vode, vazduha i ulja

Sasatav : Poliamid PA

Radni pritisak : od 14 bara do 39 bara

Radna temperatura : od -20°C do +100°C

Naziv	spolja \emptyset	rupa \emptyset
PA 4/2	4	2
PA 6/4	6	4
PA 8/6	8	6
PA 10/8	10	8
PA 12/10	12	10
PA 14/12	14	12
PA 15/12	15	12





SPIRALNA POLIAMIDNA CREVA ZA PNEUMATIKU


Poliamidno crevo za pneumatiku - spiralna:

Namena : Za transport vode, vazduha i ulja

Sastav : Poliamid PA

Radni pritisak : od 14 bara do 39 bara

Radna temperatura : od -20°C do +100°C

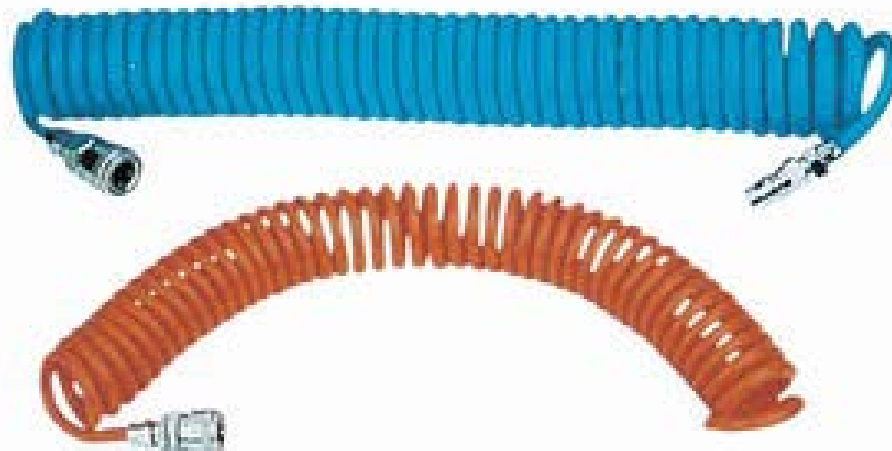



GUMENA CREVA ZA PNEUMATIKU OD 10 DO 20 BARA

Gumeno crevo za pneumatiku :

Namena : Transport vode I vazduha

Sastav : Unutrašnji sloj NBR guma ojačana tekstilnim opletom

Radni pritisak : od 6 bara do 20 bara

Radna temperatura : od -20°C do +80°C

Dimenzije : od Ø4 do Ø50





PVC CREVO ZA PNEUMATIKU



PVC crevo za pneumatiku :

Namena : Trasnport vode i vazduha

Sastav : Meki PVC (plastika) ojačana tekstilnim opletom

Radni pritisak : od 6 bara do 20 bara

Radna temperatura : od -10°C do +60°C

Dimenzije : od $\varnothing 4$ do $\varnothing 50$

