



## TEFLONSKA CREVA

### PTFE Teflonska creva :

PTFE Teflonska creva za visoke temperature I za sve namene


Sastav : Teflonsko crevo opleteno prohromskom žicom

Radni pritisak : do 265 bara, zavisnosti od unutrašnjeg prečnika creva

Radna temperatura : od -70°C do +300°C

### Teflon/PTFE Hose



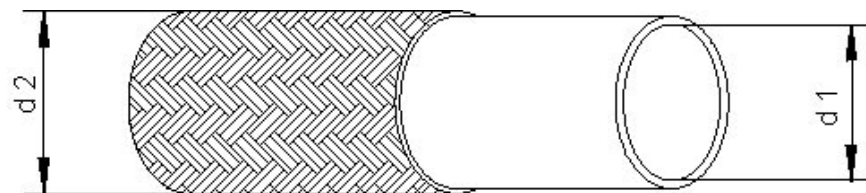

## CREVO TEFLONSKO

Naziv artikla	DN	d1	d2	Radni pritisak	Rasprsk. pritisak	min. radijus savijanja	Težina
	mm	mm	mm	bar	bar	mm	kg/m
PTFE DN 05	5	4.8	7.9	265	1050	51	0.10
PTFE DN 06	6	6.4	9.8	245	980	76	0.15
PTFE DN 08	8	7.9	11.3	210	840	101	0.17
PTFE DN 10	10	9.5	12.8	175	700	114	0.19
PTFE DN 12	12	12.7	16.5	150	595	165	0.23
PTFE DN 16	16	15.9	19.8	105	420	195	0.25
PTFE DN 20	20	19.1	22.5	80	315	203	0.30
PTFE DN 25	25	25.4	28.8	65	266	254	0.46